



Personal computers



Small computers network



Local Area Networks (LAN)



Workstations



Servers



EPOS (Electronic Point Of Sales) systems



Data Centers



Industrial PLCs



Cash registers



Electro-medical devices



Emergency devices (lights/alarms)



Telecommunication devices



e-Business (Server Farms, ISP/ASP/POP)



Industrial processes

PLUG DIALOG

350-550 VA
single-phase

PLUG DIALOG



LOAD CONFIGURATOR

Load type	Power (VA)*
Personal computer	250
LCD Monitor	70
15" Monitor	150
Scanner, printer	200
Modem, TV, DVD reader, PlayStation, Hi-Fi, Phone, Fax	50
Laser printer**	200

*Average estimated value.

**Use the Plug DIALOG filtered power output.

CHARACTERISTICS

- Maximum compactness
- 3 sockets with mains fail protection
- 1 socket with filtering for powering loads such as laser printers
- integrated protection for telephone line/modem
- cold start capability: the UPS can power up without a mains supply present
- user replaceable batteries
- USB interface
- can be placed on a desktop, floor, or be wall-mounted
- input supply and telephone cable included
- short-circuit protection
- auto restart (on mains return, after batteries have discharged)
- GS/TÜV marks
- available with French (2P+T), UK or Schuko plugs.

ADVANCED COMMUNICATION

- PowerShield² monitoring and shut-down software for Windows 95-OSR2, 98, NT 4.0, Me, XP, 2003
- Plug and Play function.

2-YEAR WARRANTY


The PLUG DIALOG range is the ideal solution for small office and home systems (SOHO) requiring over voltage and mains failure protection. The compactness, versatility (a push-button switch with LED-based mimic panel and user-replaceable batteries) and functionality of the PLUG DIALOG allow it to easily fit into any small office and home environment.

When the mains fails, connected loads are powered with a pseudo sine wave supply from the inverter. For additional security users can download a version of the PowerShield² UPS monitoring and control software.

IT Range


MODELS	PDG 400	PDG 600
POWER	350VA/225W	
INPUT		
Rated voltage	230 Vac	
Voltage range	188-262 Vac	
Frequency	50/60 Hz	
OUTPUT		
Voltage on mains operation	230 Vac	
Frequency on battery operation	50 or 60 Hz	
Waveform from battery/inverter	Pseudo sinewave	
BATTERIES		
Type	VRLA AGM Maintenance-free lead-acid	
Recharge time	6-8 h	
ENVIRONMENTAL		
Weight (kg)	3	3.1
Dimensions (hwd) (mm)	88x120x320	
Tel. protection	RJ45 connectors	
Communication	USB interface	
Safety compliance	EN 62040-1-1 and Directives 72/73 EEC, 93/68 EEC, EN 62040-3	
EMC conformance	EN 62040-2 and Directives 89/336 EEC, 92/31 EEC, 93/68 EEC	
Marks	CE; GS/TÜV	
Operating temperature	0 °C - 40 °C	
Colour	Graphite grey	
Altitude and relative humidity	6000 meters max. elevation, <95% non condensing	
Accessories provided	1 input supply cable, telephone cable	

DETAILS

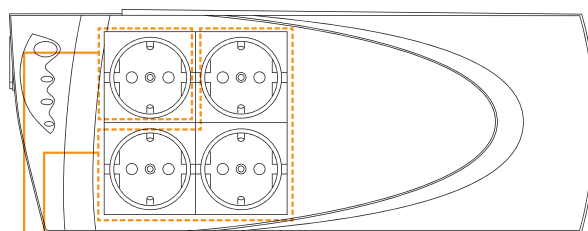

Sockets with UPS protection
(no break in power if mains fails)

Filtered socket: overvoltage protection only

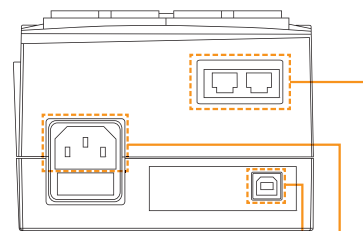

USB communication port

Mains input

Phone/modem protection

For further information contact Riello UPS Ltd:

Tel: 0800 269 394 +44-(0)1978 729 297 - Fax: 01978 729 290 - Email: sales@riello-ups.co.uk - Website: www.riello-ups.co.uk